

KEY FEATURES

- ◆ Membrane over laps, detailing and jointing sealed using 'Hot Air Welding'.
- ◆ Uncomplicated installation and detailing.
- ◆ PVC coated steel trims simplify detailing at the drip, kerbs etc
- ◆ Moisture curing adhesives ensure a reliable and long lasting bond to the substrate.

**RUVITEX UK LTD**

Merton House
38 Merton Way
West Molesey
Surrey KT8 1PQ


Phone: +44 (0) 208 941 4298
Mobile: +44 (0) 7939 353595
Fax: +44 (0) 872 115 3075
E-mail: info@ruvitex.co.uk
Web: www.ruvitex.co.uk

Ruvitex Bonded System is a flame free, clean and easily installed roofing system for new and refurbishment projects.

Ruviplan membranes are manufactured with a fleece on the underside and when bonded to the substrate with Ruvitex Adhesive provide an extremely robust finish.

RUVITEX BONDED SYSTEM

Not to scale

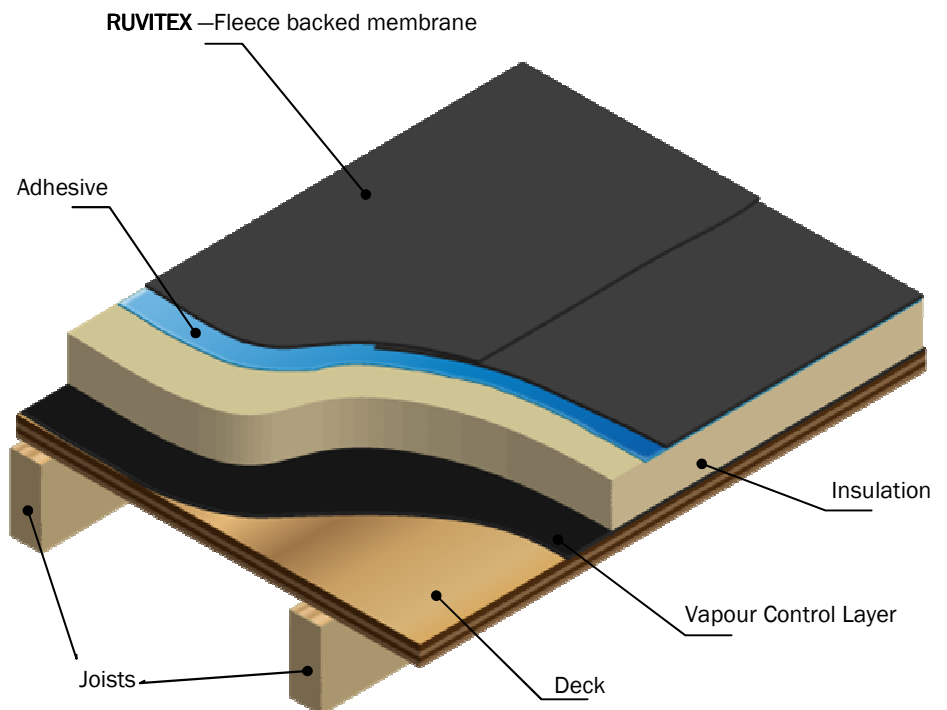

Ruvitex Bonded System is ideally suited for projects where the roof areas are small and/or access to the roof area is limited.

Ruvitex Bonded System provides advantages on projects where obtaining a satisfactory mechanical attachment is either difficult or not desirable.

Ruvitex UK Ltd

RUVITEX BONDED SYSTEM

TECHNICAL DATASHEET

SUBSTRATES

Ruvitex Bonded System can be bonded to:

- ◆ Plywood
- ◆ OSB Board
- ◆ Rigid Thermal Insulation (tissue faced)
- ◆ Rigid Thermal Insulation (plywood both sides)
- ◆ Asphalt (subject to inspection)
- ◆ Plus various other substrates subject to confirmation from Ruvitex.

APPLICATION

The roof temperature during application must not be below 5 °C or in excess of 30 °C as the working time and performance of the adhesive will be dramatically reduced.



RUVITEX UK LTD

Merton House
38 Merton Way
West Molesey
Surrey KT8 1PQ

Phone: +44 (0) 208 941 4298
Mobile: +44 (0) 7939 353595
Fax: +44 (0) 872 115 3075
E-mail: info@ruvitex.co.uk
Web: www.ruvitex.co.uk

RUVITEX BONDED OVERLAP—INSULATED

Not to scale

